



## TR 60-750BL

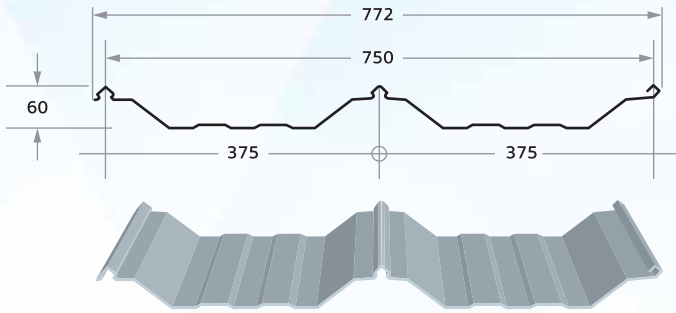

Steel Coil Width = 914 mm. (G300)

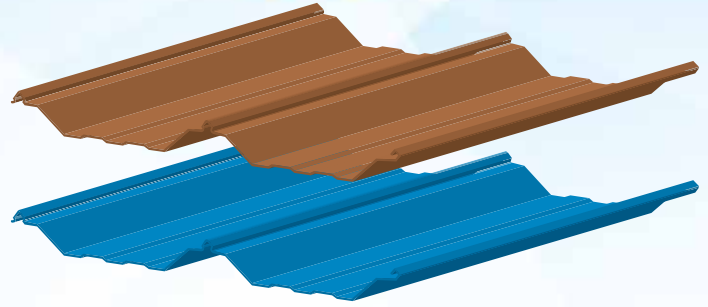

Roofing & Silding Type : คลังคาและผนัง


### Model : TR 60-750BL

Boltless System


| Thickness | Weight |                   | Moment of Intertia     | Section modulus        | Load on span (Kg/M <sup>2</sup> /2 <sup>o</sup> Slope) |        |        |        |        |        |        |        |        |
|-----------|--------|-------------------|------------------------|------------------------|--------------------------------------------------------|--------|--------|--------|--------|--------|--------|--------|--------|
| mm        | Kg/m   | Kg/m <sup>2</sup> | IX(cm <sup>4</sup> /m) | SX(cm <sup>3</sup> /m) | 1.00 m                                                 | 1.25 m | 1.50 m | 1.75 m | 2.00 m | 2.25 m | 2.50 m | 2.75 m | 3.00 m |
| 0.42      | 3.16   | 4.21              | 20.84                  | 5.18                   | 742                                                    | 451    | 259    | 162    | 107    | 74     | 53     | 38     | 29     |
| 0.45      | 3.38   | 4.51              | 22.34                  | 5.56                   | 796                                                    | 483    | 278    | 173    | 115    | 79     | 56     | 41     | 31     |
| 0.48      | 3.59   | 4.79              | 23.84                  | 5.94                   | 851                                                    | 516    | 296    | 185    | 122    | 84     | 60     | 44     | 33     |
| 0.50      | 3.74   | 4.99              | 24.84                  | 6.19                   | 887                                                    | 538    | 309    | 193    | 127    | 88     | 63     | 46     | 34     |
| 0.60      | 4.46   | 5.95              | 29.84                  | 7.45                   | 1067                                                   | 646    | 371    | 232    | 153    | 106    | 75     | 55     | 41     |

**Note :** Load on span ที่ความลาดเอียงของหลังคาต่ำสุด (minimum slope), Factor ที่ใช้คำนวณ : Wind load, Light load

## TR 110-650BL

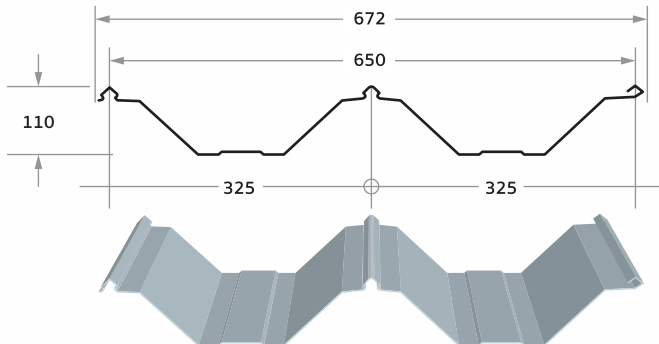

Steel Coil Width = 914 mm. (G300)

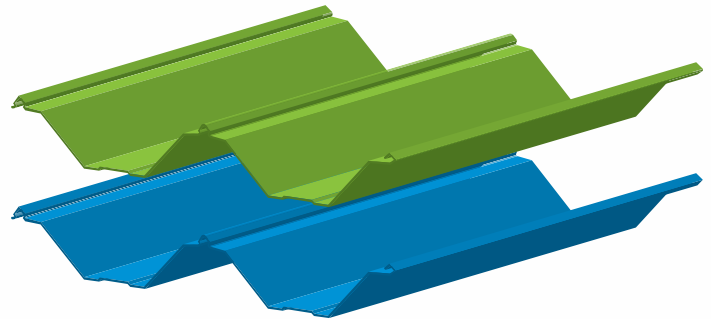

Roofing & Silding Type : คลังคาและผนัง

### Model : TR 110-650BL

Boltless System

| Thickness | Weight |                   | Moment of Intertia     | Section modulus        | Load on span (Kg/M <sup>2</sup> /2° Slope) |        |        |        |        |        |        |        |        |
|-----------|--------|-------------------|------------------------|------------------------|--------------------------------------------|--------|--------|--------|--------|--------|--------|--------|--------|
| mm        | Kg/m   | Kg/m <sup>2</sup> | IX(cm <sup>4</sup> /m) | SX(cm <sup>3</sup> /m) | 1.00 m                                     | 1.25 m | 1.50 m | 1.75 m | 2.00 m | 2.25 m | 2.50 m | 2.75 m | 3.00 m |
| 0.42      | 3.16   | 4.86              | 92.79                  | 15.45                  | 2218                                       | 1417   | 982    | 720    | 488    | 341    | 246    | 183    | 140    |
| 0.45      | 3.38   | 5.20              | 99.45                  | 16.57                  | 2381                                       | 1522   | 1055   | 774    | 525    | 367    | 266    | 199    | 152    |
| 0.48      | 3.59   | 5.52              | 106.11                 | 17.68                  | 2540                                       | 1624   | 1126   | 826    | 560    | 392    | 284    | 212    | 162    |
| 0.50      | 3.74   | 5.75              | 110.55                 | 18.43                  | 2648                                       | 1693   | 1174   | 861    | 584    | 408    | 296    | 221    | 169    |
| 0.60      | 4.46   | 6.86              | 132.78                 | 22.15                  | 3183                                       | 2034   | 1411   | 1035   | 701    | 490    | 356    | 265    | 203    |

**Note :** Load on span ที่ความลาดเอียงของหลังคาต่ำสุด (minimum slope), Factor ที่ใช้คำนวณ : Wind load, Light load